


Wood

siegling belting



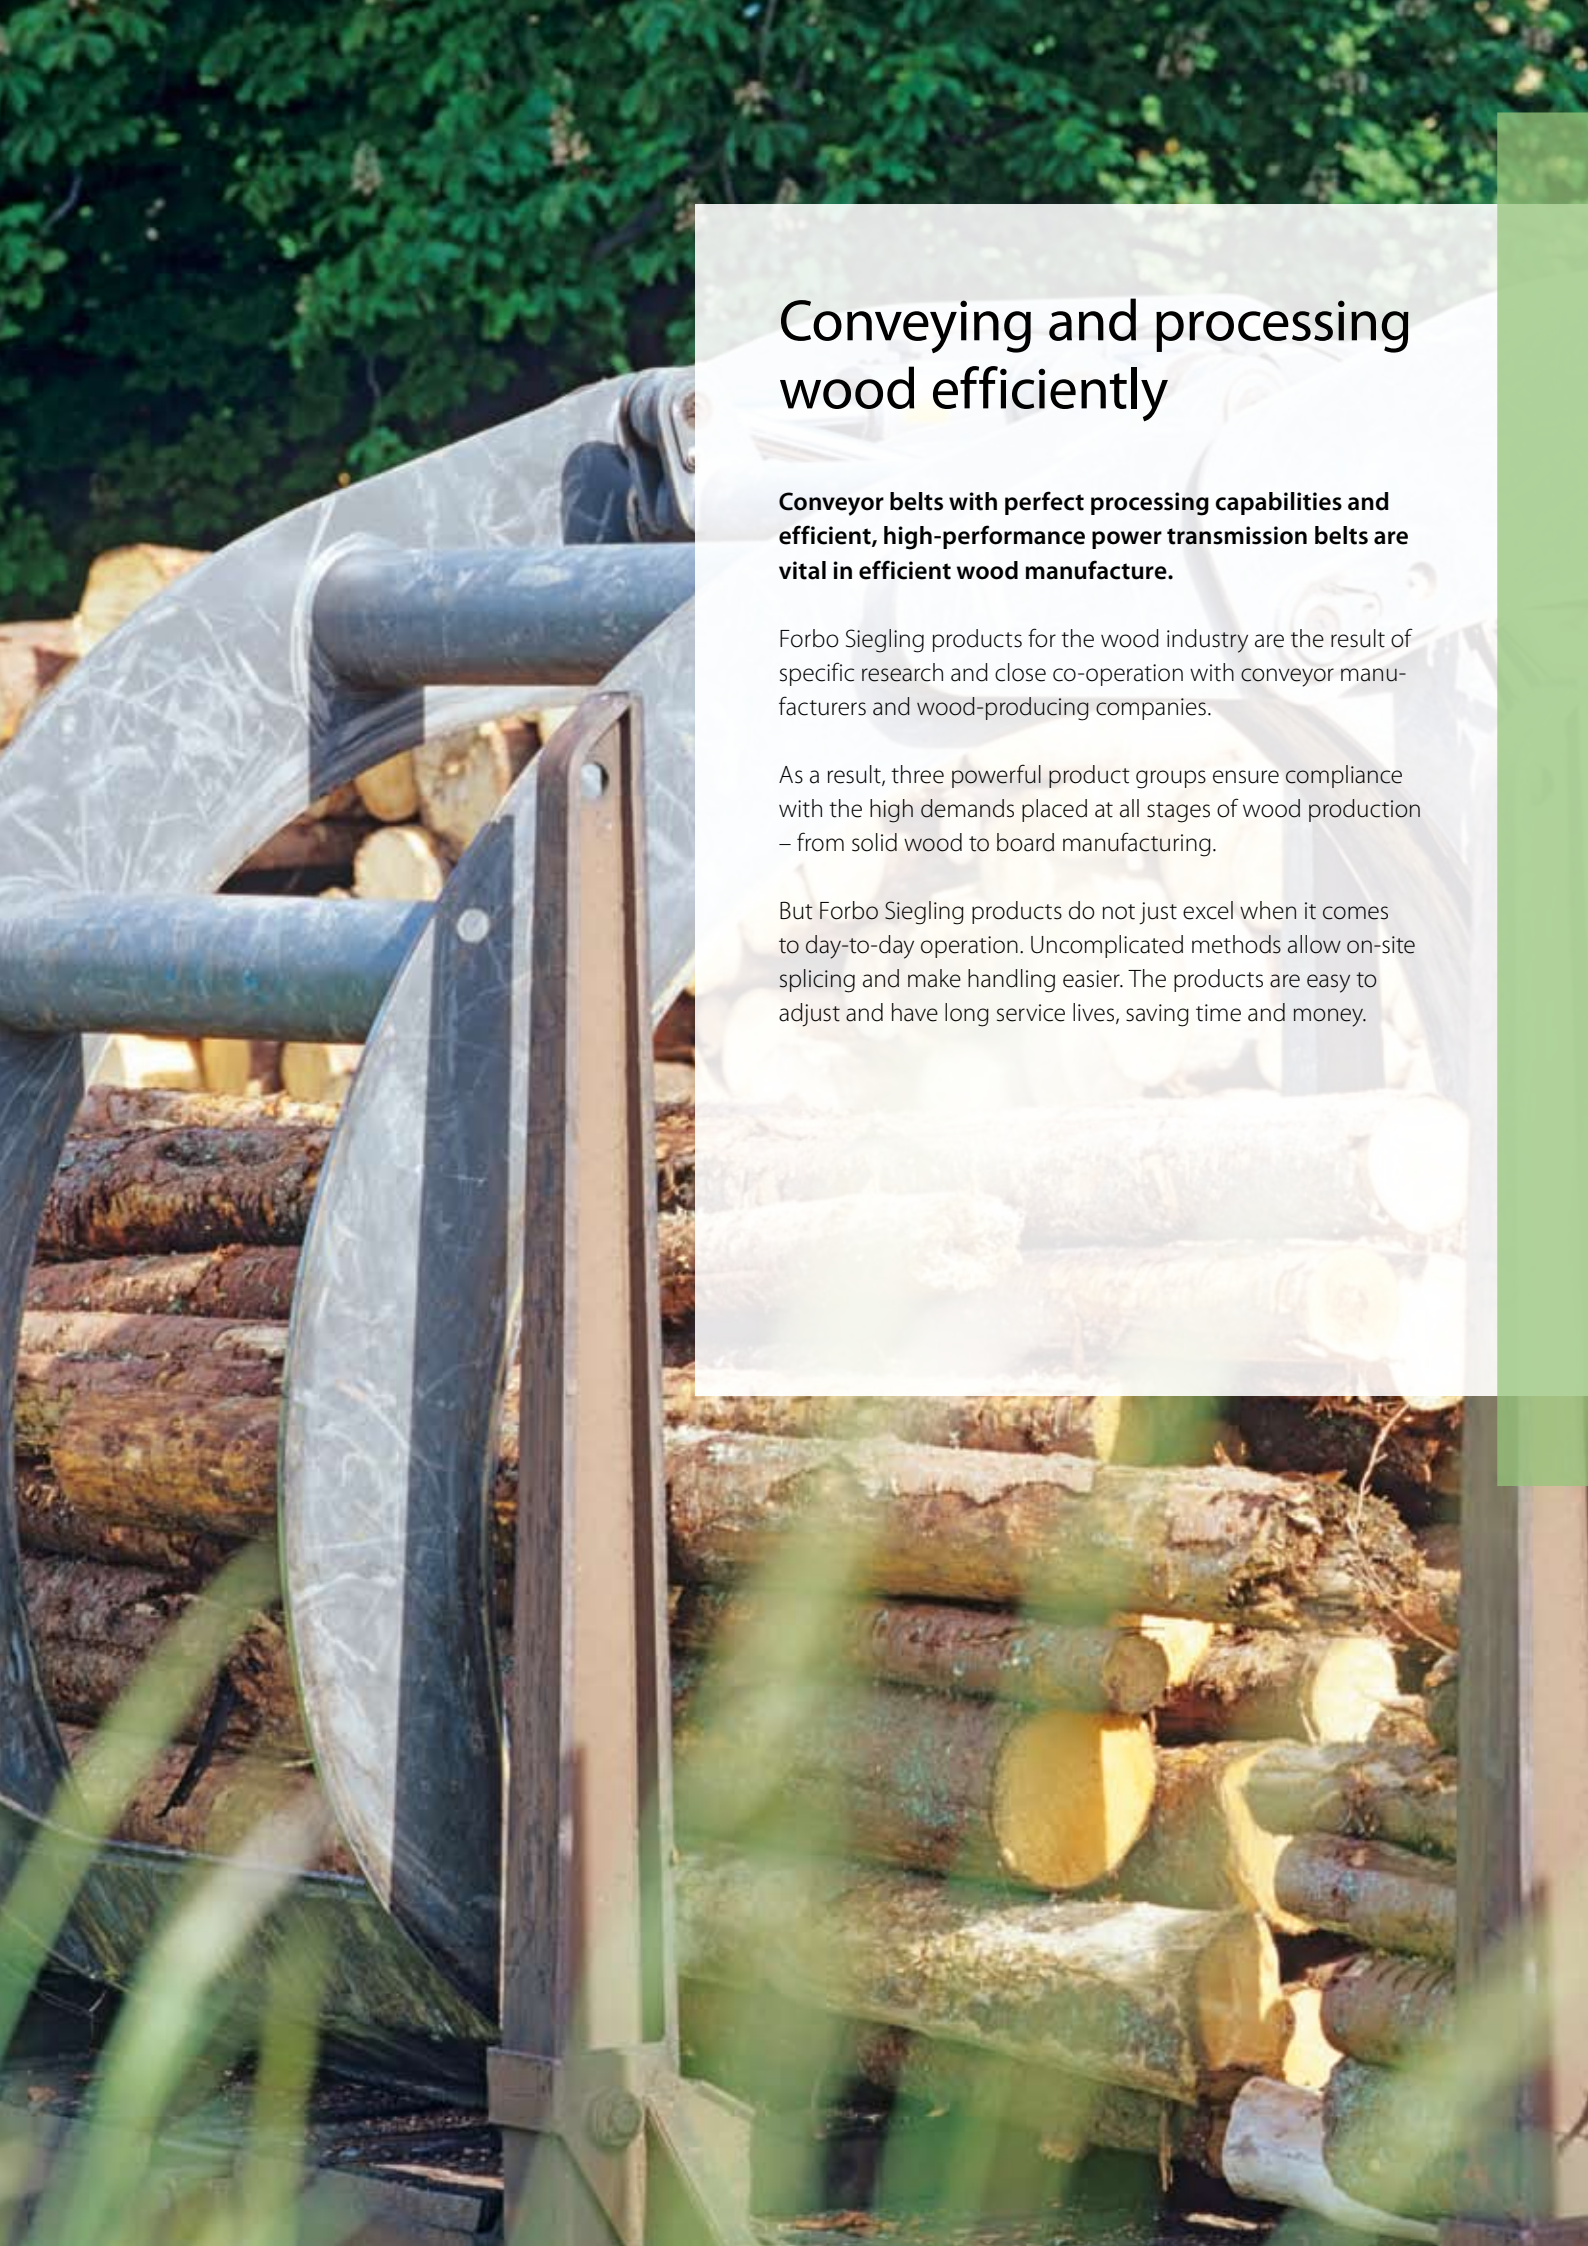

Conveying and processing wood efficiently

Conveyor belts with perfect processing capabilities and efficient, high-performance power transmission belts are vital in efficient wood manufacture.

Forbo Siegling products for the wood industry are the result of specific research and close co-operation with conveyor manufacturers and wood-producing companies.

As a result, three powerful product groups ensure compliance with the high demands placed at all stages of wood production – from solid wood to board manufacturing.

But Forbo Siegling products do not just excel when it comes to day-to-day operation. Uncomplicated methods allow on-site splicing and make handling easier. The products are easy to adjust and have long service lives, saving time and money.

Contents



siegling transilon conveyor and processing belts

Siegling Transilon Conveyor and processing belts for board production	4
Product range wood	6



siegling propipe feeder belts

Siegling Propipe Feeder belts for board processing	8
Product range wood	9



siegling extremultus flat belts

Siegling Extremultus Power transmission belts for live roller conveyors and processing machines	10
Product range wood	11

You can find information on further Forbo Siegling products relevant to the wood processing industry in the following brochures:



No.	Title
224	Siegling Transilon Conveyor and processing belts
225	Siegling Extremultus Power transmission belts
240	Siegling Transvent Ventilation belts
317	Siegling Transilon Technical information 1 Storage, finishing, fitting
318	Siegling Transilon Technical information 2 Special features and properties



MOVEMENT SYSTEMS

siegling transilon

Conveyor and processing belts for board processing

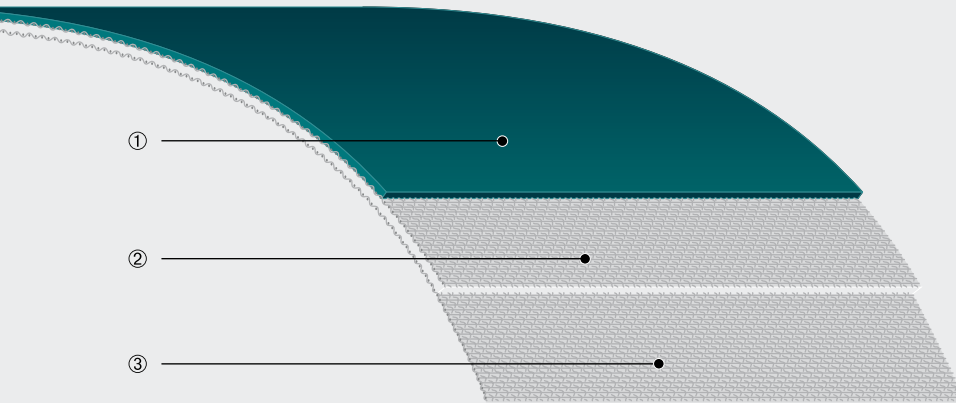

Siegling Transilon product structure

① **Top face** | Various coating materials, thicknesses and patterns, as well as the chemical, physiological and mechanical characteristics of the belt influence the grip on the goods conveyed.

② **Tension member** | The use of different special fabrics substantially influences the belt's suitability to the application. Belt tracking, elongation under force behaviour, electrostatic properties, how flat the belts are, knife edges and how much they curve all depend directly on the fabric's structure.

③ **Underside** | Different underside types determine the level of noise, energy consumption as well as wear and tear in the belt and whether it can be used for sliding or rolling support.



Former, accelerator and transfer belts

The tension member made of high-tech fabric provides a linear, steep load/extension curve. The top face has a microscopically thin, matt coating. All of the belt is very thin and manufactured with low weight tolerances ($< \pm 1\%$).

- Minimal load on the chip mat lengthways
- No caking of the chip mat
- Precise manufacture of thin sheets
- Very flexible lengthways
- No elongation during constant operation
- Very good directional stability properties
- Very short lead times, rapidly reaches dynamic operational condition
- Does not tend to deform after standing still for a long time on the drums
- Highly laterally stiff
- Flexible Z-splice.

The properties

The advantages

low elongation	▶	short take-up ranges, space-saving
longitudinally flexible	▶	small drum diameters possible
Dimensions do not alter	▶	maintenance-free, no re-tensioning
low noise during operation	▶	improved working conditions
durable	▶	economical operation
lightweight with low overall thickness	▶	easy to handle/to put into operation



Ventilation belts

The Forbo Siegling ventilation belts for pre-presses consist of a special blended fabric that is durable and strong. They have a high proportion of warp threads, are highly air permeable and have a very smooth surface. The extremely strong Z-splice, developed by Forbo Siegling leaves absolutely no marks:

- No electrostatic build-up and lower fire risk, uninterrupted production
- No adhesion of chips
- Excellent ventilation of the chip mat
- Very good surface quality of the boards
- Reliable splice.



Pre-press belts

Forbo Siegling pre-press belts have a highly modular tension member, made of aramide fabric with a tensile force of approx. 140 N/mm at operational elongation. So they are suitable for heavy pre-presses with a nip pressure of up to 3000 N/cm and belt pull of up to 1800 N/cm.

- Minimal expansion of the mat between the pressure rollers
- Minimal load on the chip mat lengthways
- Very durable surface
- Low creep
- Very short take-up ranges.

Differences in the thickness of the mat and the resulting different tensile forces over the width of the belt or the lateral forces occurring as a result of the belt tracking are compensated for by

- Higher level of lateral stiffness and
- Higher level of resistance to diagonal warping.





Conveying and finishing

For the subsequent conveying and processing of the boards Siegling Transilon conveyor and processing belts and Siegling Extremultus live roller power transmission belts with different properties are used. From robust all-rounders right up to absolute specialists.

The belts must have low elongation, be durable and need little maintenance for simple conveying tasks and when cutting to size.

In finishing (veneering, varnishing, coating) the demands rapidly increase: the belts used must be able to position accurately, be resistant to heat and solvents and easy to clean.



Technical Data	Article number	Total thickness approx. [mm]	Weight approx. [kg/m ²]	Pull at 1 % elongation (k1 relaxed) approx. [N/mm width] *	d _{min} approx. [mm] **	Permissible operating temperature [°C]	Production width [mm]	
AE 140/3 U0/U4H MT	black	906441	4.0	4.2	75.0 ¹⁾	250	-30/+100	3600
E 3/2 U0/U0	transparent	900009	1.2	1.1	5.0	6	-30/+100	4700
E 8/2 U0/U2	green	900320	1.4	1.6	7.5	15	-10/+100	3600
E 8/2 U0/U2 MT-NA	white	900277	1.4	1.45	7.5	25	-30/+90	3300
E 8/2 U0/V2H MT	green	900208	1.5	1.6	8.0	40	-10/+70	3000
E 8/2 U0/V5	green	900025	2.2	2.5	8.0	40	-10/+70	3000
E 10/2 0/P2 GL	transparent	906459	1.9	1.9	11.0	90/40 (Z) ³⁾	-10/+100	1800
E 12/2 U0/V7	green	900045	2.9	3.4	11.0	60	-10/+70	3000
E 15/M V1/V10H	green	900324	5.0	5.4	12.0	125	-10/+70	2500
E 18/3 U0/G 50 R	grey	900298	8.0	9.0	14.0	160	-10/+70	2200
E 18/3 U0/V5H MT-SE	black	906395	3.0	3.7	16.0	125	-10/+70	3000
E 18/H U0/U2 MT	white	906420	1.9	1.85	22.0	20/16 ⁴⁾	-50/+100	4200
E 4/2 U1/U2 H	black ATEX	906389	1.4	1.55	5.0	40/80 ⁵⁾	-10/+100	3000
E 18/H U0/U2 MT-LF	black ATEX	906611	1.75	1.85	16.0	20/16 ⁴⁾	-30/+100	3600
Novo 40 HC		900221	4.0	2.2	12.0	70	-10/+120	2000
Novo 60 HC		900286	5.5	3.1	12.0	120	-10/+120	2000
Transvent W01 ²⁾	blue	900403	1.9	1.4	7.0	200	-30/+100	4500
Transvent W02 (Conducto 2206) ²⁾	blue	900386	1.95	1.55	7.0	200	-30/+100	4500
Transvent W03 (Conducto 5090) ²⁾	blue	900336	1.85	1.55	18.0	200	-30/+100	4500

Splicing methods

Key criteria in choosing the method are, in addition to the strength of the splice, its flexibility, the quality of the splice's finish and the effort required to make it. Three types of splice are widespread in the wood processing industry:

Z-splice ①

Fulfills the highest of demands where uniformity of thickness is concerned. Very flexible splice for single and double ply types.

The extremely tough Z-splice, developed for making the Ventilation belts endless, leaves no marks.

Overlap splice ②




Particularly for two and three-ply belt types, subjected to a high level of mechanical stress.

Mechanical fasteners ③

So that the belt can be installed and taken off quickly without disassembling parts of the machinery.


Forbo Siegling offers a comprehensive range of compact fitting devices for all splice methods.

An overview of tools and equipment, tool sheets and instructions is available on request.

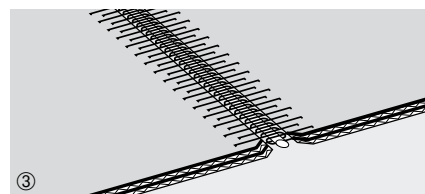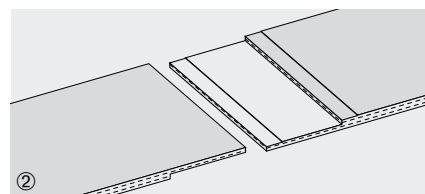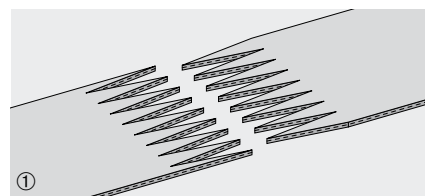

siegling propipe

Feeder belts for board processing

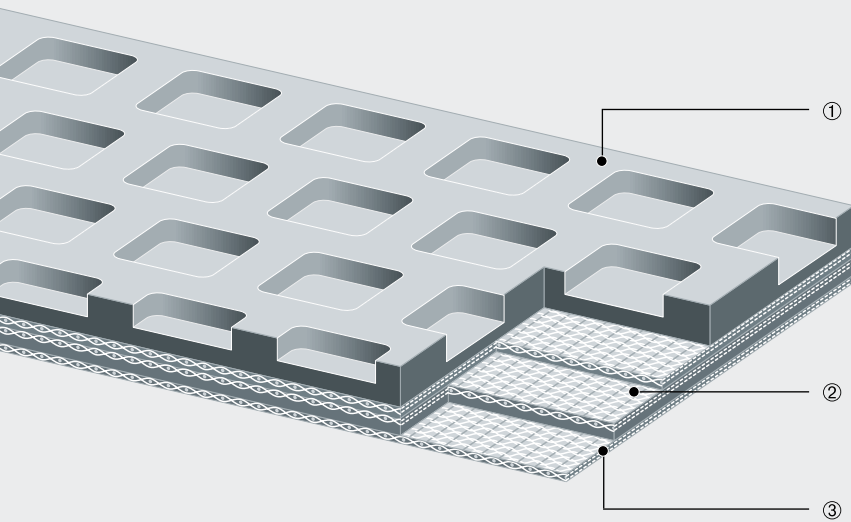

Siegling Propipe product structure

① **Top face** | Perfect adaptation of hardness and elasticity to the process concerned, due to different shore hardness and patterns.
Available in natural rubber NR and nitrile butyl rubber NBR.

② **Tension member** | Tension member without splice and low lengthways elongation in four different strengths.

③ **Underside** | Low drag, abrasion-resistant underside.

The properties

high level of drag

dimensionally stable

low drag underside

long service life

flexible lengthways

The advantages



▶ excellent grip with no creep

▶ reliable and maintenance free

▶ smooth tracking, low energy loss

▶ economical to run

▶ low power consumption



As a feeder belt for wide belt sanders, planers and brushing machines in the wood and metal working industry, Siegling Propipe plays a key role in the exact and efficient manufacture of board products.


Siegling Propipe belts are totally flat and the same thickness. With different surface patterns and hardness, we have the right belt type for any kind of material or process.

Made to precise tolerances in the dimensions you specify.

siegling propipe feeder belts

Strength category*	Pattern	Colour**	Shore [A]				Thickness [mm]	Work load [N/mm]	Elongation at fitting [%]	d _{min} [mm]
			40 Shore [A]	50 Shore [A]	60 Shore [A]	70 Shore [A]				
S	AP25	GY		●	●	●	7	12	1.5	90
S	AP25	BK		●	●	●	7	12	1.5	90
S	AN25	GY		●	●	●	7	12	1.5	90
S	QN10	GY		●	●	●	7	12	1.5	90
S	QN15	GY	●	●	●	●	7	12	1.5	90
S	RN12	GY		●	●	●	7	12	1.5	90
S	RN12	BK		●	●	●	7	12	1.5	90
S	RN20	GY		●	●	●	7	12	1.5	90
L	AP25	GY		●	●	●	8	20	1.4	100
L	AP25	BK		●	●	●	8	20	1.4	100
L	AN25	GY		●	●	●	8	20	1.4	100
L	QN10	GY		●	●	●	8	20	1.4	100
L	QN10	BK		●	●	●	8	20	1.4	100
L	QN15	GY		●	●	●	8	20	1.4	100
L	RN12	GY		●	●	●	8	20	1.4	100
L	RN12	BK		●	●	●	8	20	1.4	100
L	RN20	GY		●	●	●	8	20	1.4	100
L	TN15	GY		●	●	●	8	20	1.4	100
M	AP25	GY		●	●	●	10	22	1.2	120
M	AP25	BK		●	●	●	10	22	1.2	120
M	AN25	GY		●	●	●	10	22	1.2	120
M	QN10	GY		●	●	●	10	22	1.2	120
M	QN15	GY		●	●	●	10	22	1.2	120
M	RN12	GY		●	●	●	10	22	1.2	120
M	RN20	GY		●	●	●	10	22	1.2	120
P	AP25	GY		●	●	●	11	30	1.3	150
P	AN25	GY		●	●	●	11	30	1.3	150
P	QN10	GY		●	●	●	11	30	1.3	150
P	QN15	GY	●	●	●	●	11	30	1.3	150
P	RN12	GY		●	●	●	11	30	1.3	150
P	RN20	GY		●	●	●	11	30	1.3	150

Patterns (Scale 1:2.5)

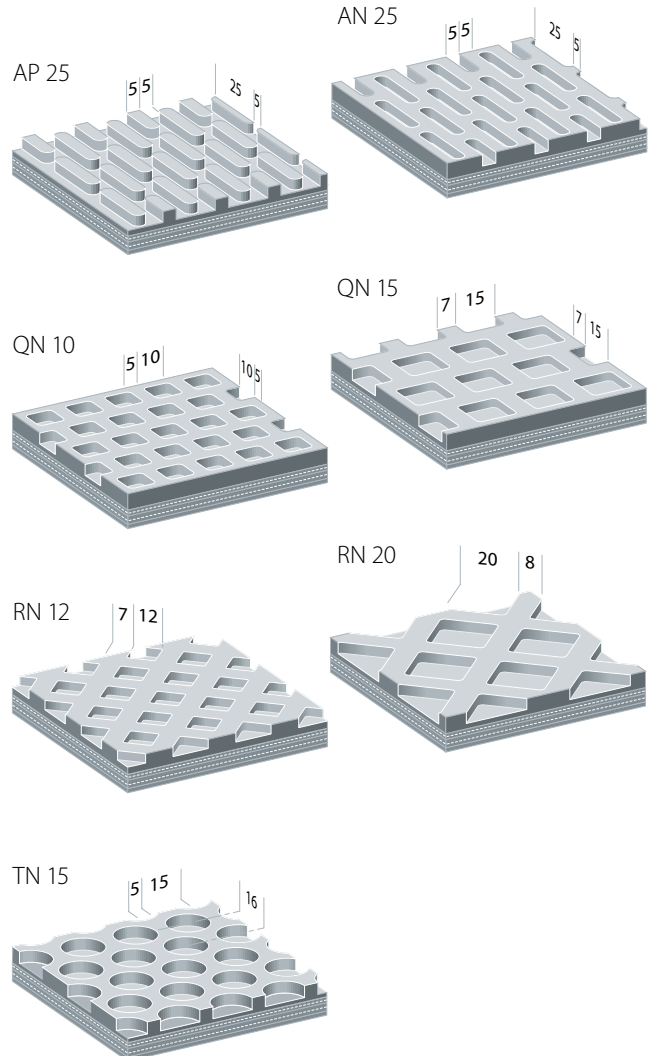

Dimensions produced

Length min. (width ≤ 600 mm)	1740 mm
Length min. (width > 600 mm)	1870 mm
Length max. (standard)	5840 mm
Width max. (standard)	1360 mm
Length max. (special dimensions)	6000 – 24000 mm
Width max. (special dimensions)	2200 mm

Tolerances

Internal length ≤ 5000 mm	+ 0.5/-1 %
Internal length > 5000 mm	± 1 %
Width ≤ 2000 mm	± 1 %, min. 3 mm
Thickness	± 0.5 mm

Key



* Tension member	Underside
S = single-ply polyester fabric	+ polyester fabric
L = double-ply polyester fabric	+ polyester fabric
M = double-ply polyester fabric	+ cotton fabric
P = triple-ply polyester fabric	+ polyester fabric (cotton on request)

** GY = grey
Very shock and tear proof, resists pressure with high level of drag.

BK = black
Same properties as GY, but also antistatic in accordance with DIN 22104.
A further black recipe resistant to oil and grease is also available on request.

siegling extremultus

Power transmission belts for live roller conveyors and processing machines

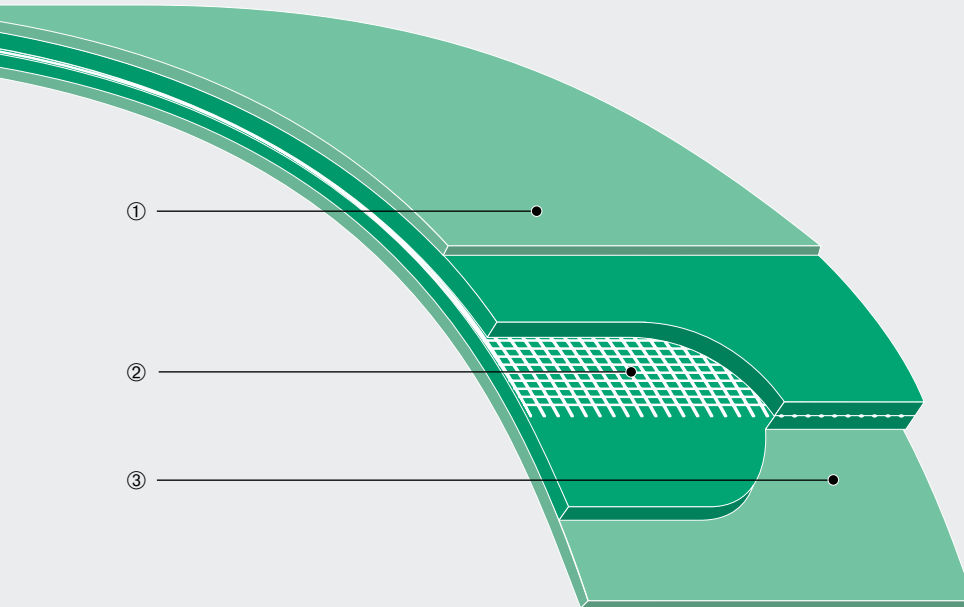

Siegling Extremultus product structure

- ① **Friction layer** | Rubber elastomer or urethane.
- ② **Tension member structure** | with tension member made of polyester fabric or polyamide belt (not shown).
- ③ **Friction layer** | Rubber elastomer, urethane or fabric as underside (TG 30E-30).



The combination of tension member and coating gives the belts its special profile of properties – customised to the type of conveyor and each type of drive task.

The tension member is made of polyamide sheet, polyester fabric or polyester cord (endless series) and is embedded in a thermoplastic intermediate layer. Highly elastic elastomer or urethane provide the coating materials.

The properties

The advantages

endless splicing without adhesives*	▶	short fitting times
extremely flexible	▶	very small drum diameters possible
does not absorb moisture*	▶	consistent tension, independent of ambient conditions
minimal flexing	▶	low energy consumption

Siegling Extremultus live roller drives are easy to clean and resistant to most oils, grease and many solvents.

* Applies to E types and endless types.

siegling extremultus flat belts

Technical Data		Article number	Total thickness approx. [mm]	Weight approx. [kg/m ²]	ϵ_{\max} [%]	F_w value approx. [N/mm] ($\epsilon = 1\%$; $\beta = 180^\circ$)	Nominal effective pull approx. [N/mm belt width] ($\epsilon = 2\%$; $\beta = 180^\circ$)*	d_{\min} approx. [mm]**	Permissible operating temperature [°C]	Max. width supplied [mm]	Recommendations for use	Board conveying	Wood sanding machines	Live rollers	Flakers, chippers
E types – polyester fabric tension members															
GG 20E-20 NSTR/FSTR	grey/black	822145	2.0	2.2	2.0	20	20	24	-20/+70	500				●	
GG 30E-32 FSTR/FSTR	black	822118	3.2	3.55	2.0	30	30	40	-20/+70	500				●	
TG 30E-30	black/green	822058	3.0	3.2	2.0	30	-	40	-20/+70	500	●			●	
UU 20E-16 FSTR/FSTR	green	822055	1.6	1.85	2.0	20	14	30	-20/+70	500				●	
UU 30E-20 FSTR/FSTR	green	822133	2.0	2.2	2.0	30	20	30	-20/+70	500				●	
UU 30E-32 FSTR/FSTR	green	822105	3.2	3.55	2.0	30	20	30	-20/+70	500				●	
Endless types – polyester cord tension members															
GT 40E	black	810032	2.4	2.5	1.5	80	40 ¹⁾	160	-20/+60	480 ²⁾			●		
P types – polyamide belt tension members															
GG 14P-30	green	850324	3.0	3.4	3.0	14	14	30	-20/+80	500				●	
GT 40P	black	850049	3.65	4.0	3.5	40	40	200	-20/+80	1000					●
GT 54P	black	850050	4.5	4.9	3.5	54	54	300	-20/+80	1000					●
GT 80P	black	850051	6.0	6.4	3.5	80	80	400	-20/+80	1000					●

* The nominal effective pull states the possible power transmission in N/mm belt width (standard ambient conditions 23°C/50%) that the belt type can produce at nominal elongation.

** The lowest permissible pulley (roller) diameters were established in standard ambient conditions. Lower temperatures or especially low humidity require bigger diameters.


¹⁾ At 1%

²⁾ Length supplied 420 to 13700 mm



Type designation for Siegling Extremultus flat belts

GG 30E - 32 FSTR/FSTR black
GT 40E black
GG 14P - 30 green

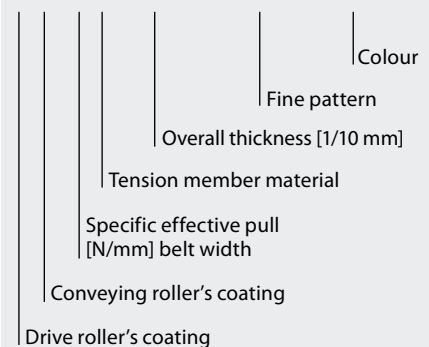


A Aramide **P** Polyamide
E Polyester **U** Urethane
G Rubber/elastomer

Siegling – total belting solutions

Committed staff, quality-orientated organisation and production processes ensure the constantly high standards of our products and services. The Forbo Siegling Quality Management System is certified in accordance with DIN EN ISO 9001.

In addition to product quality, environmental protection is an important corporate goal. Early on we also introduced an environmental management system, certified in accordance with ISO 14001.

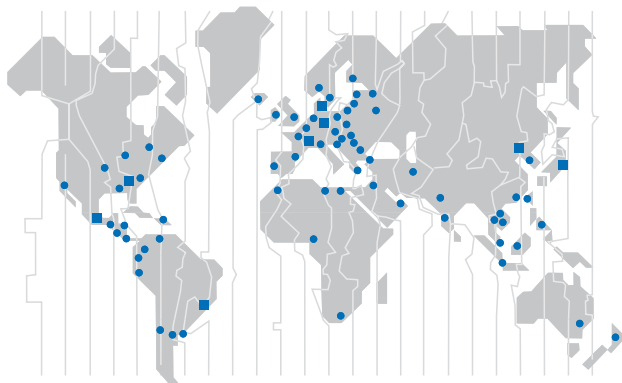

Forbo Siegling Service – anytime, anywhere

In the company group, Forbo Siegling employs more than 1800 people worldwide. Our production facilities are located in eight countries; you can find companies and agencies with stock and workshops in more than 50 countries. Forbo Siegling service centres provide qualified assistance at more than 300 locations throughout the world.