


siegling proposition

timing belts

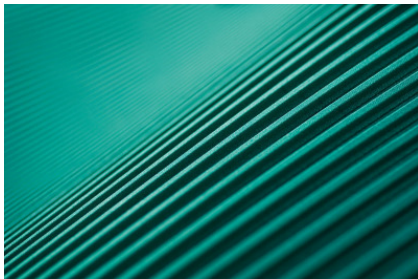

Extra wide polyurethane timing belts

Properties/Advantages

- Widths up to 18" (WH = Wide H) and 450 mm (WT10 = wide T10).
- Colour: natural
- Kevlar cords
- FDA compliant
- Available with PA fabric on one or both sides

Applications

- Tire industry
- Hygiene industry
- In general: as an alternative for conveyor belts where positioning of the belt is important

Basic technical data

Minimum welded belt length: 33" for WH and 850 mm for WT10

Minimum number of pulley teeth: 14 for WH and 16 for WT10

Minimum diameter of tensioning idler: 3" for WH and 80 mm for WT 10

180.2

FMS · Reproduction of text or parts thereof only with our approval.

Modifications reserved.

Forbo Siegling Nederland BV
Van Rensselaerweg 1
NL – 6956 AV Spankeren
Tel +31 313 491114, Fax +31 313 4922314
Email oscar.rondeel@forbo.com

Siegling – total belting solutions



MOVEMENT SYSTEMS